

NEW!

SNAPQUICK SERIES

SNAPQUICK SERIES



Patent Pending

Actual size

### SnapQuik™ is a break away connector ideal for small bore applications.

The compact design delivers high flow fluid transfer in a small profile. Featuring a unique internal latching mechanism that creates a smooth, streamlined exterior that is easy to clean and use. The user-friendly break away design of SnapQuik prevents misconnections with luer lock fittings, protects equipment and ensures patient safety.

Features	Benefits
Break away latch mechanism	Intuitive, rapid disconnection
Internal latch design	Streamlined exterior is easy to clean
Audible click at connection	Assures reliable connection is made
Does not mate to luer fittings	Improved patient safety


### Specifications

- Pressure:** Vacuum to 15 psi, 1.03 bar
- Temperature:** 32° to 122° F (0° to 50° C)
- Materials:**
  - Main components: Acetal
  - O-ring: Buna-N
- Color:** Natural White
- Tubing Sizes:** 3/32" and 1/8" ID


**WARNING:** Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of Colder's products in their own application conditions.

SnapQuik's revolutionary lubrication technique ensures consistent connection forces throughout the lifetime of the connectors, even when aggressive cleaning techniques are used.

SnapQuik Water Flow

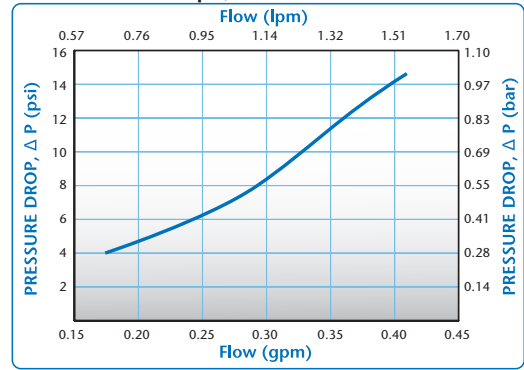


SnapQuik Air Flow, 100 psig Inlet Pressure

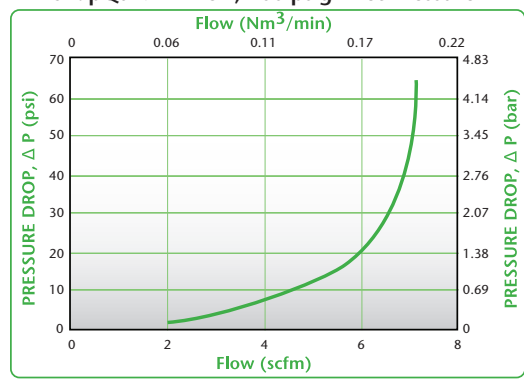

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of the graph represents the operating range of the product family, i.e. upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

## Product Dimensions

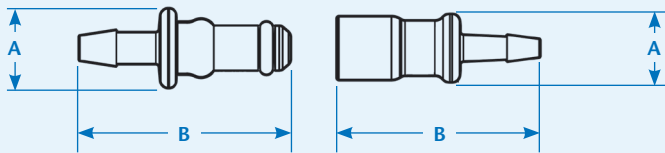

A = Height/Diameter  
B = Total Length

## Coupling Bodies

### ACETAL




TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
IN-LINE	3/32" ID	2.4mm	BSQ17015	0.36	1.09
HOSE BARB	1/8" ID	3.2mm	BSQ1702	0.36	1.09

## Coupling Inserts

### ACETAL



TERMINATION	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	A	B
IN-LINE	3/32" ID	2.4mm	BSQ22015	0.42	1.14
HOSE BARB	1/8" ID	3.2mm	BSQ2202	0.42	1.14

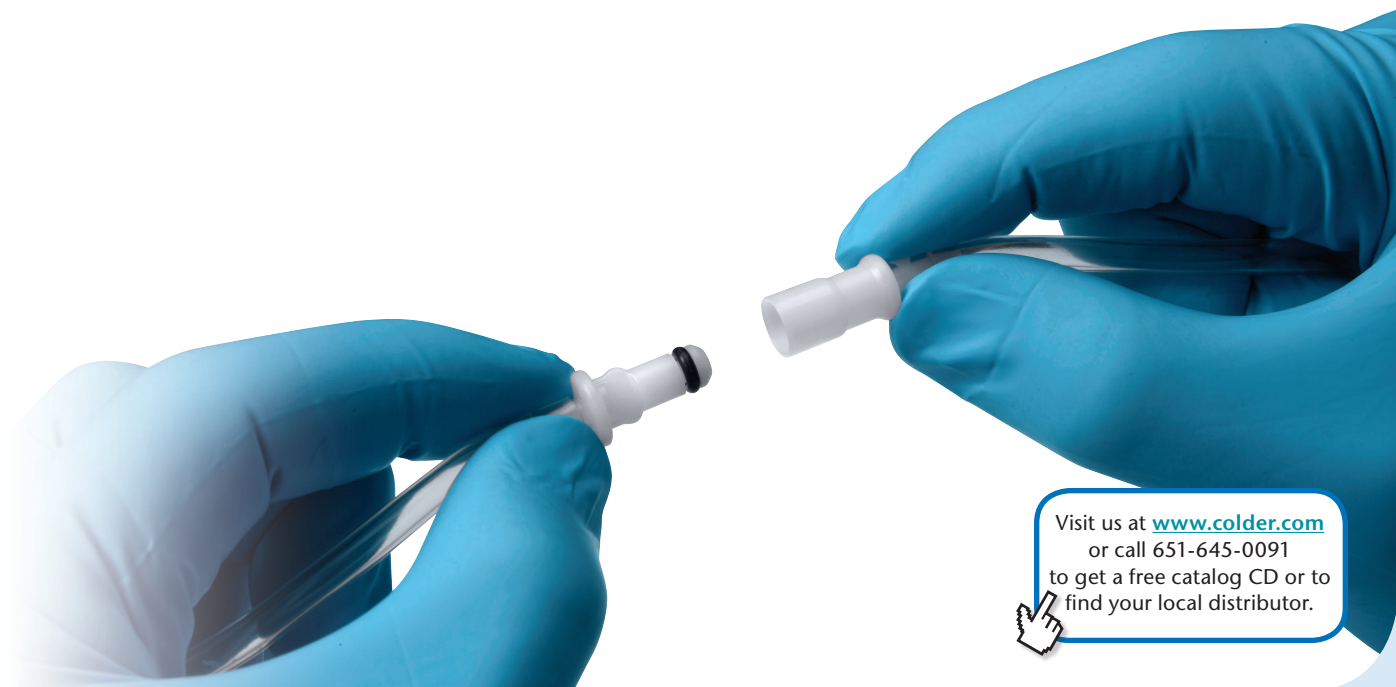

Visit us at [www.colder.com](http://www.colder.com)  
or call 651-645-0091  
to get a free catalog CD or to  
find your local distributor.

**CPC** **Colder Products Company**  
Quick Couplings & Fittings for Plastic Tubing

**Colder Products Company**  
1001 Westgate Drive  
St. Paul, Minnesota 55114  
U.S.A.

Phone: 651-645-0091  
Fax: 651-645-5404  
Toll Free: 800-444-2474  
info@colder.com  
[www.colder.com](http://www.colder.com)

**Colder Products Company GmbH**  
Schmalweg 50  
D-55252 Mainz-Kastel  
Germany

Phone: +49-6134-2878-0  
Fax: +49-6134-287828  
cpcgmbh@colder.com  
[www.colder.com](http://www.colder.com)

**Colder Products Company Limited**  
Flat B, 29/F., West Gate Tower,  
7 Wing Hong Street,  
Cheung Sha Wan,  
Kowloon, Hong Kong

Phone: 852-2987-5272  
Fax: 852-2987-2509  
asiapacific@colder.com  
[www.colder.com](http://www.colder.com)

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the Colder catalog. Contact your local distributor or Colder Customer Service for warranty provisions.  
Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of Colder. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.