

LQ4 SERIES CONNECTOR





LQ4 Series quick disconnect couplings provide ultra-reliable, dripless connections and disconnections that protect valuable electronics. Designed specifically for liquid cooling applications, LQ4 uses patent-pending valve technology that eliminates drips and is able to withstand long-term use.

FEATURES

- Non-spill design
- Redundant sealing when connected
- Color-coding
- Friction-free valve
- Enhanced latch design
- Lower, ergonomic profile

BENEFITS

- Disconnect under pressure with no spills
- Extra protection from leaks
- Instant visual difference in cooling lines
- Valving system designed for extended periods in connected state
- Easy to see orientation on manifolds and tubing
- Meets size requirements for space-constrained electronics

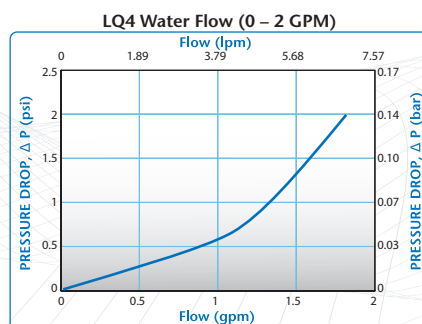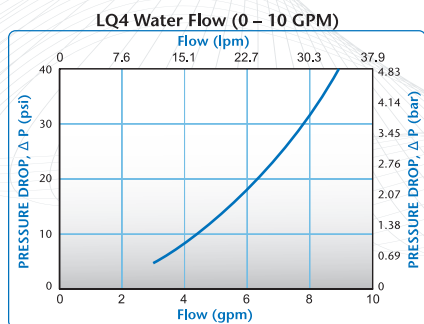

Specifications ● ● ●

PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

0°F to 240°F (-17°C to 115°C)

MAXIMUM FLOW AT DISCONNECT:

3.0 gal/min, 11.3L/min

MATERIALS:

Main housing components:

Chrome-plated brass

Valves and thumb latch: Polysulfone

Valve spring (wetted): Stainless steel

External spring: Stainless steel

Seals: EPDM

COLOR:

Chrome with Cool Blue or Warm Red

TUBING SIZES:

1/4" to 3/8" ID, 6.4mm to 9.5mm ID

LUBRICANTS: Krytox® PFPE

SPILLAGE:


0.025 cc per disconnect rated at 0 psi

0.055 cc per disconnect rated at 120 psi


INCLUSION: 0.025 cc per connect

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.

These graphs are intended to give you a general idea of the performance capabilities of each product line. Contact CPC for flow of a particular coupling combination.

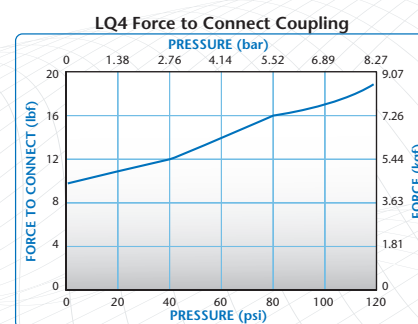



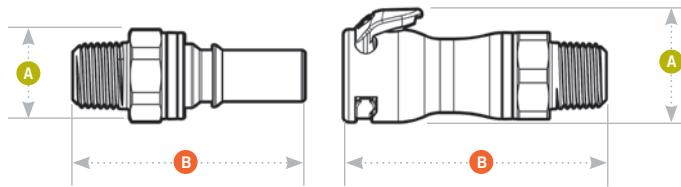

LQ4 DIMENSIONS







A = Height/Diameter
B = Total Length

Coupling Bodies • CHROME-PLATED BRASS

TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	SHUTOFF	A	B
	1/4" ID	6.4mm ID	LQ4D17004RED	0.98	2.50
	1/4" ID	6.4mm ID	LQ4D17004BLU	0.98	2.50
	3/8" ID	9.5mm ID	LQ4D17006RED	0.98	2.50
	3/8" ID	9.5mm ID	LQ4D17006BLU	0.98	2.50
	1/4 SAE-4		LQ4D30004RED	1.02	2.21
	1/4 SAE-4		LQ4D30004BLU	1.02	2.21
	3/8 SAE-6		LQ4D30006RED	1.02	2.24
	3/8 SAE-6		LQ4D30006BLU	1.02	2.24
	1/4" NPT		LQ4D10004RED	1.02	2.35
	1/4" NPT		LQ4D10004BLU	1.02	2.35
	3/8" NPT		LQ4D10006RED	1.02	2.35
	3/8" NPT		LQ4D10006BLU	1.02	2.35
	1/4" ID x 3/8" OD		LQ4D13006RED	1.02	2.50
	1/4" ID x 3/8" OD		LQ4D13006BLU	1.02	2.50

Coupling Inserts • CHROME-PLATED BRASS

TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	SHUTOFF	A	B
	1/4" ID	6.4mm ID	LQ4D22004RED	0.80	2.34
	1/4" ID	6.4mm ID	LQ4D20004BLU	0.80	2.34
	3/8" ID	9.5mm ID	LQ4D22006BLU	0.80	2.34
	3/8" ID	9.5mm ID	LQ4D22006RED	0.80	2.34
	1/4 SAE-04		LQ4D46004BLU	0.88	2.05
	1/4 SAE-04		LQ4D46004RED	0.88	2.05
	3/8 SAE-06		LQ4D46006BLU	0.75	1.65
	3/8 SAE-06		LQ4D46006RED	0.75	1.65
	1/4" NPT		LQ4D24004RED	0.88	2.19
	1/4" NPT		LQ4D24004BLU	0.88	2.19
	3/8" NPT		LQ4D24006RED	0.88	2.19
	3/8" NPT		LQ4D24006BLU	0.88	2.19
	1/4" ID x 3/8" OD		LQ4D20006RED	0.88	2.34
	1/4" ID x 3/8" OD		LQ4D20006BLU	0.88	2.34

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters.



Distributed by:



Infiltec GmbH
Alte Rheinhäuser Str. 6-8
67346 Speyer am Rhein

Tel: +49 6232 100332 0
Fax: +49 6232 100332 42
info@infiltec.de
infiltec.de

COLDER PRODUCTS COMPANY
2820 CLEVELAND AVE. N.
ROSEVILLE, MN 55113
U.S.A.

PHONE: +1 651-645-0091
FAX: +1 651-645-5404

info@cpeworldwide.com
cpeworldwide.com

COLDER PRODUCTS COMPANY GMBH
KURHESSENSTR. 15
64546 MÖRFELDEN-WALLDORF
GERMANY

PHONE: +49-6026-9973-0

cpcgmbh@cpeworldwide.com
cpcworldwide.com

COLDER PRODUCTS COMPANY LIMITED
LEVEL 19,
TWO INTERNATIONAL FINANCE CENTRE
8 FINANCE STREET, CENTRAL, HONG KONG

PHONE: +852 2987-5272
FAX: +852-2987-2509

asiapacific@cpeworldwide.com
cpcworldwide.com



CPC WARRANTY STATEMENT: CPC (Colder Products Company) warrants its products against defects in workmanship and materials for a period of 12 months from the date of sale by CPC to its initial customer (regardless of any subsequent sale of the products). This warranty is void if the product is misused, altered, tampered with or is installed or used in a manner that is inconsistent with CPC's written recommendations, specifications and/or instructions, or fails to perform due to normal wear and tear. CPC does not warrant the suitability of the product for any particular application. Determining product application suitability is solely the customer's responsibility. CPC is not liable for special, indirect, incidental, consequential or other damages including, but not limited to, loss, damage, personal injury, or any other expense directly or indirectly arising from the use of or inability to use its products either separately or in combination with other products. ALL OTHER WARRANTIES EXPRESS OR IMPLIED, WHETHER ORAL, WRITTEN OR IN ANY OTHER FORM, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY EXCLUDED. The sole and exclusive remedy under this warranty is limited, at the option of CPC, to replacement of the defective product or an account credit in the amount of the original selling price. All allegedly defective CPC products must be returned prepaid transportation to CPC, together with information describing the product's application and performance, unless otherwise authorized in writing by CPC.

CPC PATENT STATEMENT: CPC takes pride in its innovative quick disconnect coupling and fittings solutions, many of which have been awarded United States and international patents. CPC has a strong tradition of

leadership in the quick disconnect market, and aggressively pursues and protects its proprietary information and intellectual property. In cases where it is practical and has a benefit to its customers, CPC has licensed its proprietary technology. Please contact CPC to discuss your unique needs.

CPC TRADEMARK STATEMENT: AseptiQuik®, BottleQuik®, BreakAway®, ChemQuik®, DrumQuik®, FitQuik®, IdentiQuik®, Nu-Seal®, SnapQuik®, Steam-Thru®, Softube® are registered trademarks with the U.S. Patent & Trademark Office. All other trademarks or service marks are property of their respective owners. **WARNING:** Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

COPYRIGHT © 2020 COLDER PRODUCTS COMPANY. All rights reserved. Colder Products Company, Colder Products and CPC are all registered trademarks with the US Patent & Trademark Office.

WARNING: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

CAT2020 4/17