

NS6 SERIES CONNECTOR



NS6 Series couplings couplings feature non-spill valves at a great price. Use the NS6 when even a few drops of spillage pose problems regarding safety, media cost or environmental regulations. These innovative couplings are lightweight, chemically resistant and easy to use. The non-spill design virtually eliminates spills, minimizes downtime and enhances operator safety. Soft touch overmold makes them comfortable in the hand and very attractive.


FEATURES

- Non-spill design
- Color coding
- Glass-filled polypropylene
- CPC thumb latch

BENEFITS

- Disconnect under pressure with no spills
- Instant visual differentiation of media lines
- Durable and compatible with many chemicals
- One-hand connection and disconnection

» These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of each graph represents the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

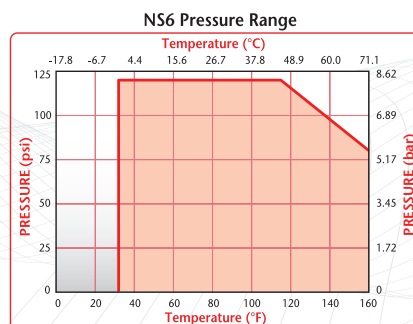

Specifications ● ● ●

PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

32°F to 160°F (0°C to 71°C)

MATERIALS:

Main components and valves: Glass-filled polypropylene with TPV* soft touch overmold

Thumb latch: Glass-filled polypropylene

Valve spring (wetted): 316 stainless steel

External spring: 316 stainless steel

O-rings: EPDM

COLOR:

Gray with dark gray overmold standard; gray with red or blue overmold available†

TUBING SIZES:

3/8" and 1/2" ID, 9.5mm and 12.7mm ID

LUBRICANTS:

Krytox® PFPE (inert)

SPILLAGE:


~0.03 cc per disconnect @ 0 psi, ~0.30 cc/ disconnect @ 120 psi

INCLUSION:


0.42 cc per connect

*The overmold material is a TPV (thermoplastic vulcanizate). This TPV is an alloy of polypropylene thermoplastic and fully vulcanized EPDM rubber. The material is typically resistant to water, acids and bases.

†NOTE: Standard product is gray; color options require a set-up charge and minimum quantities. Please contact CPC for details.

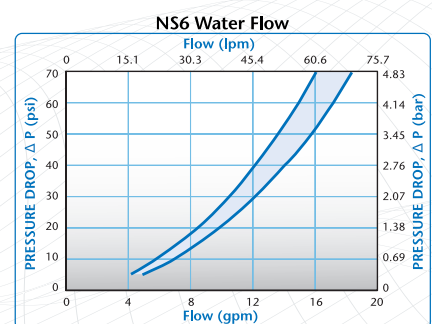


NS6 DIMENSIONS

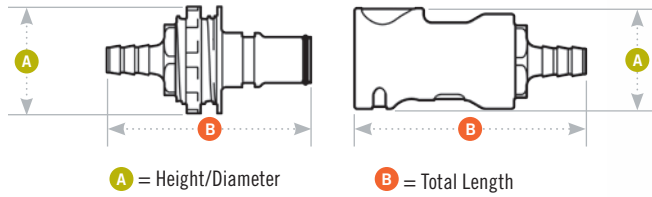

Panel Dimensions

| | | |
|-------------------------|----------------------|--|
| | PANEL OPENING | PANEL THICKNESS MAX. - MIN. |
| COUPLING INSERTS | see drawing | .25 - .03 |

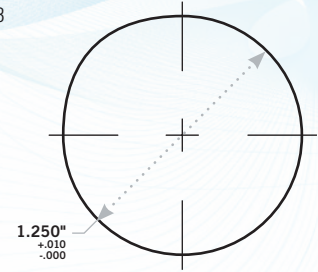

Coupling Bodies • POLYPROPYLENE

| TERMINATION | TUBING/THREAD SIZE | METRIC EQ. | SHUTOFF | A | B |
|----------------------------|--------------------|------------|---------------|----------|----------|
| IN-LINE PIPE THREAD | 1/2" NPT | | NS6D10008 | 1.31 | 3.01 |
| | 1/2" BSPT | | NS6D10008BSPT | 1.31 | 3.01 |
| IN-LINE COMPRESSION | 1/2" OD | 12.7mm OD | NS6D13008 | 1.31 | 3.53 |
| IN-LINE HOSE BARB | 3/8" ID | 9.5mm ID | NS6D17006 | 1.31 | 3.16 |
| | 1/2" ID | 12.7mm ID | NS6D17008 | 1.31 | 3.16 |

Coupling Inserts • POLYPROPYLENE

| TERMINATION | TUBING/THREAD SIZE | METRIC EQ. | SHUTOFF | A | B |
|--------------------------------|--------------------|------------|---------------|----------|----------|
| IN-LINE PIPE THREAD | 1/2" NPT | | NS6D24008 | 1.31 | 2.44 |
| | 1/2" BSPT | | NS6D24008BSPT | 1.31 | 2.44 |
| IN-LINE COMPRESSION | 1/2" OD | 12.7mm OD | NS6D20008 | 1.31 | 3.01 |
| IN-LINE HOSE BARB | 3/8" ID | 9.5mm ID | NS6D22006 | 1.31 | 2.59 |
| | 1/2" ID | 12.7mm ID | NS6D22008 | 1.31 | 2.59 |
| PANEL MOUNT COMPRESSION | 1/2" OD | 12.7mm OD | NS6D40008 | 1.50 | 3.32 |
| | | | | | |
| PANEL MOUNT HOSE BARB | 3/8" ID | 9.5mm ID | NS6D42006 | 1.50 | 2.85 |
| | 1/2" ID | 12.7mm ID | NS6D42008 | 1.50 | 2.85 |

Accessories

| DESCRIPTION | MATERIAL | PART NO. |
|--|----------|----------|
| PANEL MOUNT GASKET REPLACEMENT: For sealing panel mount bodies listed above | EPDM | 1884300 |
| | FKM | 1889600 |

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters. Couplings are pictured with valves unless otherwise noted.



Distributed by:



Infiltec GmbH
Alte Rheinhäuser Str. 6-8
67346 Speyer am Rhein

Tel: +49 6232 100332 0
Fax: +49 6232 100332 42
info@infiltec.de
infiltec.de

COLDER PRODUCTS COMPANY
2820 CLEVELAND AVE. N.
ROSEVILLE, MN 55113
U.S.A.

PHONE: +1 651-645-0091
FAX: +1 651-645-5404

info@cpeworldwide.com
cpeworldwide.com

COLDER PRODUCTS COMPANY GMBH
KURHESSENSTR. 15
64546 MÖRFELDEN-WALLDORF
GERMANY


PHONE: +49-6026-9973-0

cpcgmbh@cpeworldwide.com
cpcworldwide.com

COLDER PRODUCTS COMPANY LIMITED
LEVEL 19,
TWO INTERNATIONAL FINANCE CENTRE
8 FINANCE STREET, CENTRAL, HONG KONG

PHONE: +852 2987-5272
FAX: +852-2987-2509

asiapacific@cpeworldwide.com
cpeworldwide.com



CPC WARRANTY STATEMENT: CPC (Colder Products Company) warrants its products against defects in workmanship and materials for a period of 12 months from the date of sale by CPC to its initial customer (regardless of any subsequent sale of the products). This warranty is void if the product is misused, altered, tampered with or is installed or used in a manner that is inconsistent with CPC's written recommendations, specifications and/or instructions, or fails to perform due to normal wear and tear. CPC does not warrant the suitability of the product for any particular application. Determining product application suitability is solely the customer's responsibility. CPC is not liable for special, indirect, incidental, consequential or other damages including, but not limited to, loss, damage, personal injury, or any other expense directly or indirectly arising from the use of or inability to use its products either separately or in combination with other products. **ALL OTHER WARRANTIES EXPRESS OR IMPLIED, WHETHER ORAL, WRITTEN OR IN ANY OTHER FORM, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY EXCLUDED.** The sole and exclusive remedy under this warranty is limited, at the option of CPC, to replacement of the defective product or an account credit in the amount of the original selling price. All allegedly defective CPC products must be returned prepaid transportation to CPC, together with information describing the product's application and performance, unless otherwise authorized in writing by CPC.

CPC PATENT STATEMENT: CPC takes pride in its innovative quick disconnect coupling and fittings solutions, many of which have been awarded United States and international patents. CPC has a strong tradition of

leadership in the quick disconnect market, and aggressively pursues and protects its proprietary information and intellectual property. In cases where it is practical and has a benefit to its customers, CPC has licensed its proprietary technology. Please contact CPC to discuss your unique needs.

CPC TRADEMARK STATEMENT: AseptiQuik®, BottleQuik®, BreakAway®, ChemQuik®, DrumQuik®, FitQuik®, IdentiQuik®, Nu-Seal®, SnapQuik®, Steam-Thru®, Softube® are registered trademarks with the U.S. Patent & Trademark Office. All other trademarks or service marks are property of their respective owners. **WARNING:** Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

COPYRIGHT © 2020 COLDER PRODUCTS COMPANY. All rights reserved. Colder Products Company, Colder Products and CPC are all registered trademarks with the US Patent & Trademark Office.

WARNING: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

CAT2020 4/17