

# PMC SERIES CONNECTOR



**The 1/8" flow PMC** coupling covers a wide variety of general-purpose applications. Featuring the CPC thumb latch, the PMC is easier to use than ball-and-sleeve designs. One-hand connection/disconnection and integral terminations make the PMC the choice for ease of use and manufacture.

This coupling is NuSeal® compatible (see page 27 for details).

## FEATURES

- Hose barb shroud
- Integral terminations
- Compatible
- Clicks when connected

## BENEFITS

- Extra protection for the 1/16" hose barb
- Fewer leak points, shorter assemblies, faster installations
- Mates with PMC12 and MC Series couplings (see pages 30 and 34)
- Assurance of a reliable connection

## Specifications ● ● ●

### PRESSURE:

Vacuum to 120 psi, 8.3 bar

### TEMPERATURE:

-40°F to 180°F (-40°C to 82°C)

### MATERIALS:

- Main components and valves:** Acetal
- Thumb latch:** Stainless steel
- Valve spring:** 316 stainless steel
- External springs and pin:** Stainless steel
- O-rings:** Buna-N

### COLOR:

Natural white, others available

### TUBING SIZES:

1/16" to 1/4" ID, 1.6mm to 6.4mm ID


**WARNING:** Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC products in their own application conditions.

Also available in NSF listed versions. Please visit our website for part number information.




These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of each graph represents the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.


PMC Air Flow, 100 psig Inlet Pressure

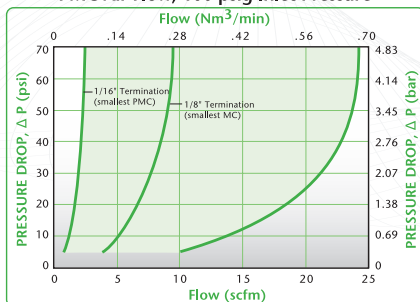


PMC Water Flow

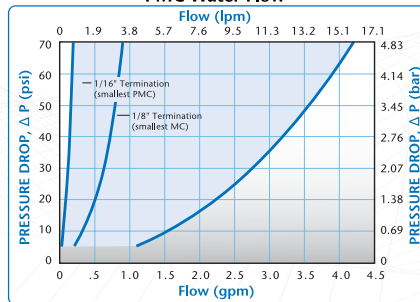

PMC Pressure Range

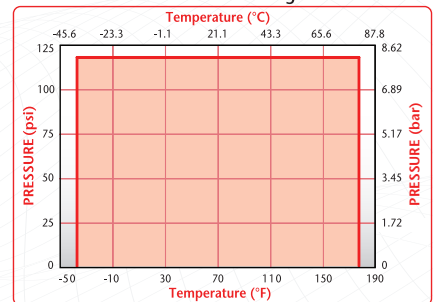


# PMC DIMENSIONS

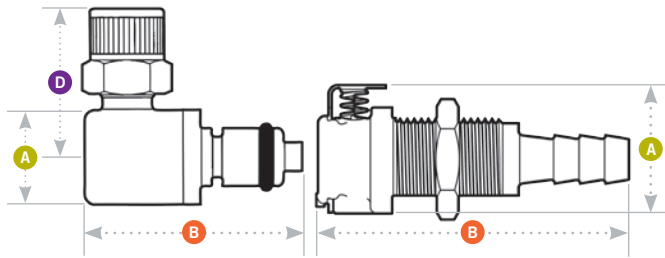

- A** = Height/Diameter
- B** = Total Length
- D** = Elbow Radial Length

## Panel Dimensions

	PANEL OPENING	PANEL THICKNESS MAX. – MIN.	PANEL NUT HEX	PANEL NUT THREAD
<b>COUPLING BODIES</b>	see drawing	.50 – .05	5/8	1/2-24UNS
<b>COUPLING INSERTS</b>	1/2	.30 – .05	5/8	1/2-24UNS

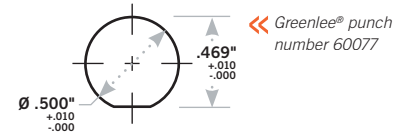

## Coupling Bodies • ACETAL

TERMINATION	TUBING/THREAD SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
<b>IN-LINE PIPE THREAD</b>	1/8" NPT		PMC1002	PMCD1002	.79	1.00
	1/8" BSPT		PMC1002BSPT	PMCD1002BSPT	.79	1.00
	1/4" NPT		PMC1004	PMCD1004	.79	1.10
	1/4" BSPT		PMC1004BSPT	PMCD1004BSPT	.79	1.10
<b>PANEL MOUNT FERRULELESS POLYTUBE FITTING, PTF†</b>	5/32" OD, .10" ID	4.0mm OD, 2.0mm ID	PMC12M42	PMCD12M42	.77	1.65
	1/4" OD, .17" ID	4.0mm OD, 2.5mm ID	PMC12025	PMCD12025	.77	1.70
		6.4mm OD, 4.3mm ID	PMC1204	PMCD1204	.77	1.72
<b>PANEL MOUNT HOSE BARB</b>	1/16" ID	1.6mm ID	PMC1601	PMCD1601	.77	1.40
	1/8" ID	3.2mm ID	PMC1602	PMCD1602	.77	1.65
	3/16" ID	4.8mm ID	PMC1603	PMCD1603	.77	1.85
	1/4" ID	6.4mm ID	PMC1604	PMCD1604	.77	1.85
<b>PANEL MOUNT FEMALE THREAD</b>	10-32 UNF		PMC181032	PMCD181032	.77	1.25
<b>IN-LINE FERRULELESS POLYTUBE FITTING, PTF†</b>	5/32" OD, .10" ID	4.0mm OD, 2.0mm ID	PMC13M42	PMCD13M42	.81	1.65
		4.0mm OD, 2.5mm ID	PMC13025	PMCD13025	.81	1.65
		5.0mm OD, 3.0mm ID	PMC13M5	PMCD13M5	.81	1.72
	1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC1304	PMCD1304	.81	1.75
<b>IN-LINE HOSE BARB</b>	1/16" ID	1.6mm ID	PMC1701	PMCD1701	.81	1.41
	1/8" ID	3.2mm ID	PMC1702	PMCD1702	.81	1.45/1.65
	3/16" ID	4.8mm ID	PMC1703	PMCD1703	.81	1.65/1.85
	1/4" ID	6.4mm ID	PMC1704	PMCD1704	.81	1.65/1.85
<b>IN-LINE FEMALE THREAD</b>	10-32 UNF		PMC191032	PMCD191032	.81	1.25

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters. †NOTE: CPC's Ferruleless PTF (polytube fitting) terminations do not require ferrules to achieve a secure connection and are therefore easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc.

## Coupling Inserts • ACETAL



**TERMINATION**  
**IN-LINE**  
**PIPE THREAD**

TUBING/THREAD SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B	D
1/8" NPT		PMC2402	PMCD2402	.58	1.03/1.45	
1/8" BSPT		PMC2402BSPT	PMCD2402BSPT	.58	1.03/1.44	
1/4" NPT		PMC2404	PMCD2404	.65	1.13/1.42	
1/4" BSPT		PMC2404BSPT	PMCD2404BSPT	.65	1.13/1.42	

**PANEL MOUNT**  
**FERRULELESS**  
**POLYTUBE FITTING,**  
**PTF†**  
*(non-valved shown)*

1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC4004	PMCD4004	.72	1.70/1.82	
------------------	--------------------	---------	----------	-----	-----------	--

**PANEL MOUNT**  
**HOSE BARB**

1/16" ID	1.6mm ID	PMC4201	PMCD4201	.72	1.38/1.50	
1/8" ID	3.2mm ID	PMC4202	PMCD4202	.72	1.63/1.75	
3/16" ID	4.8mm ID	PMC4203	PMCD4203	.72	1.83/1.95	
1/4" ID	6.4mm ID	PMC4204	PMCD4204	.72	1.83/1.95	

**IN-LINE**  
**FERRULELESS**  
**POLYTUBE FITTING,**  
**PTF†**

	4.0mm OD, 2.0mm ID	PMC20M42	PMCD20M42	.58	1.08/1.60	
5/32" OD, .10" ID	4.0mm OD, 2.5mm ID	PMC20025	PMCD20025	.58	1.13/1.65	
1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC2004	PMCD2004	.58	1.15/1.57	
3/8" OD, .25" ID	9.5mm OD, 6.4mm ID	PMC2006	PMCD2006	.65	1.40/1.52	

**IN-LINE**  
**HOSE BARB**  
*(non-valved shown)*

1/16" ID	1.6mm ID	PMC2201	PMCD2201	.50	.80/1.47	
1/8" ID	3.2mm ID	PMC2202	PMCD2202	.50	1.00/1.67	
3/16" ID	4.8mm ID	PMC2203	PMCD2203	.50	1.20/1.88	
1/4" ID	6.4mm ID	PMC2204	PMCD2204	.50	1.22/1.70	

**IN-LINE**  
**FEMALE THREAD**

10-32 UNF		PMC281032	PMCD281032	.58	.63/1.31	
-----------	--	-----------	------------	-----	----------	--

**ELBOW**  
**FERRULELESS**  
**POLYTUBE FITTING,**  
**PTF†**

5/32" OD, .10" ID	4.0mm OD, 2.5mm ID	PMC21025		.50	1.17	.75
1/4" OD, .17" ID	6.4mm OD, 4.3mm ID	PMC2104	PMCD2104	.50	1.17/1.21	.77

**ELBOW**  
**HOSE BARB**  
*(non-valved shown)*

1/8" ID	3.2mm ID	PMC2302	PMCD2302	.50	.85/1.21	.75/69
1/4" ID	6.4mm ID	PMC2304	PMCD2304	.50	1.00/1.21	.95/90

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters. Couplings are pictured with valves unless otherwise noted. †NOTE: CPC's Ferruleless PTF (polytube fitting) terminations do not require ferrules to achieve a secure connection and are therefore easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc.

Smart fluid handling to take you forward, faster.

COPYRIGHT © 2020 COLDER PRODUCTS COMPANY. All rights reserved. Colder Products Company, Colder Products and CPC are all registered trademarks with the US Patent & Trademark Office.



Distributed by:



**Infiltec GmbH**  
Alte Rheinhäuser Str. 6-8  
67346 Speyer am Rhein

Tel: +49 6232 100332 0  
Fax: +49 6232 100332 42  
info@infiltec.de  
infiltec.de

**COLDER PRODUCTS COMPANY**  
2820 CLEVELAND AVE. N.  
ROSEVILLE, MN 55113  
U.S.A.

**PHONE:** +1 651-645-0091  
**FAX:** +1 651-645-5404

info@cpeworldwide.com  
cpeworldwide.com

**COLDER PRODUCTS COMPANY GMBH**  
KURHESSENSTR. 15  
64546 MÖRFELDEN-WALLDORF  
GERMANY


**PHONE:** +49-6026-9973-0

cpcgmbh@cpeworldwide.com  
cpcworldwide.com

**COLDER PRODUCTS COMPANY LIMITED**  
LEVEL 19,  
TWO INTERNATIONAL FINANCE CENTRE  
8 FINANCE STREET, CENTRAL, HONG KONG

**PHONE:** +852 2987-5272  
**FAX:** +852-2987-2509

asiapacific@cpeworldwide.com  
cpeworldwide.com



**CPC WARRANTY STATEMENT:** CPC (Colder Products Company) warrants its products against defects in workmanship and materials for a period of 12 months from the date of sale by CPC to its initial customer (regardless of any subsequent sale of the products). This warranty is void if the product is misused, altered, tampered with or is installed or used in a manner that is inconsistent with CPC's written recommendations, specifications and/or instructions, or fails to perform due to normal wear and tear. CPC does not warrant the suitability of the product for any particular application. Determining product application suitability is solely the customer's responsibility. CPC is not liable for special, indirect, incidental, consequential or other damages including, but not limited to, loss, damage, personal injury, or any other expense directly or indirectly arising from the use of or inability to use its products either separately or in combination with other products. **ALL OTHER WARRANTIES EXPRESS OR IMPLIED, WHETHER ORAL, WRITTEN OR IN ANY OTHER FORM, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY EXCLUDED.** The sole and exclusive remedy under this warranty is limited, at the option of CPC, to replacement of the defective product or an account credit in the amount of the original selling price. All allegedly defective CPC products must be returned prepaid transportation to CPC, together with information describing the product's application and performance, unless otherwise authorized in writing by CPC.

**CPC PATENT STATEMENT:** CPC takes pride in its innovative quick disconnect coupling and fittings solutions, many of which have been awarded United States and international patents. CPC has a strong tradition of

leadership in the quick disconnect market, and aggressively pursues and protects its proprietary information and intellectual property. In cases where it is practical and has a benefit to its customers, CPC has licensed its proprietary technology. Please contact CPC to discuss your unique needs.

**CPC TRADEMARK STATEMENT:** AseptiQuik®, BottleQuik®, BreakAway®, ChemQuik®, DrumQuik®, FitQuik®, IdentiQuik®, Nu-Seal®, SnapQuik®, Steam-Thru®, Softube® are registered trademarks with the U.S. Patent & Trademark Office. All other trademarks or service marks are property of their respective owners. **WARNING:** Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

**COPYRIGHT © 2020 COLDER PRODUCTS COMPANY.** All rights reserved. Colder Products Company, Colder Products and CPC are all registered trademarks with the US Patent & Trademark Office.

**WARNING:** Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

CAT2020 4/17